




# SCRAPER CONVEYOR



Scraper conveyors are designed to transport loose materials, both horizontally and at inclination angle up to 40°. They allow to transport input materials over long distances. Conveyor's size, as well as quantity and location of feed and discharge chutes (inlet and outlet channels) are adapted according to individual requirements of end user. One of the type of scraper conveyor in our offer is "redler" type conveyor.

## SCRAPER CONVEYOR

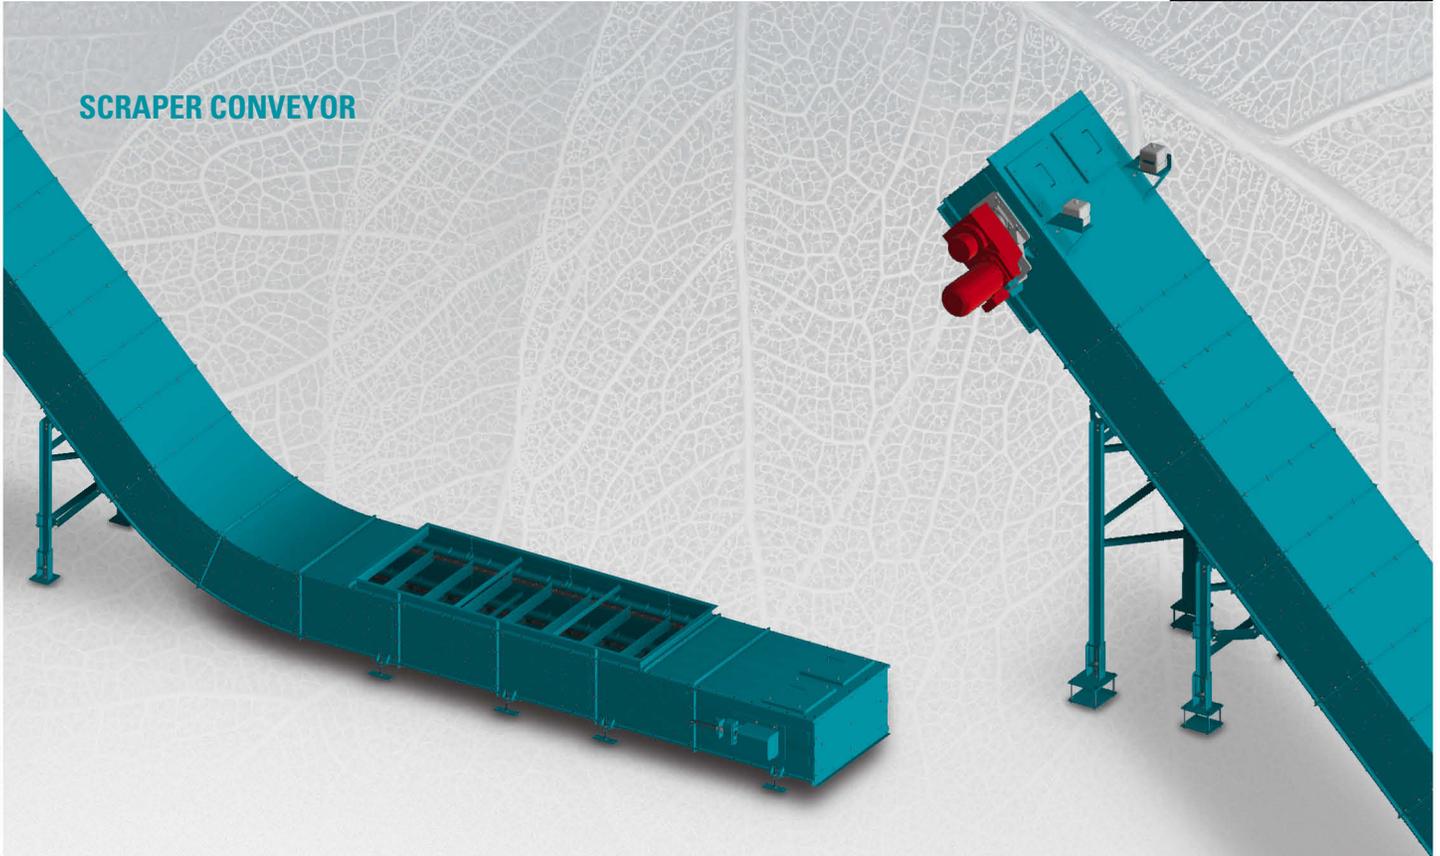

## TECHNICAL CHARACTERISTICS

WIDTH [mm]	up to 1600
DRIVE	gearmotor SEW/NORD
SPEED	adjustable according to performance/capacity
CHAIN INSTALLATION	single or double chain strand

## ADDITIONAL INFORMATION

- automated chain lubrication system
- adapted to work both in closed facilities and in open spaces
- replaceable chain guides
- possibility to install dustproof cover



**Technical parameters of our devices are being selected according to experience of SIGMA engineers and individual customer's requirements.**