





CHAIN CONVEYOR BELT

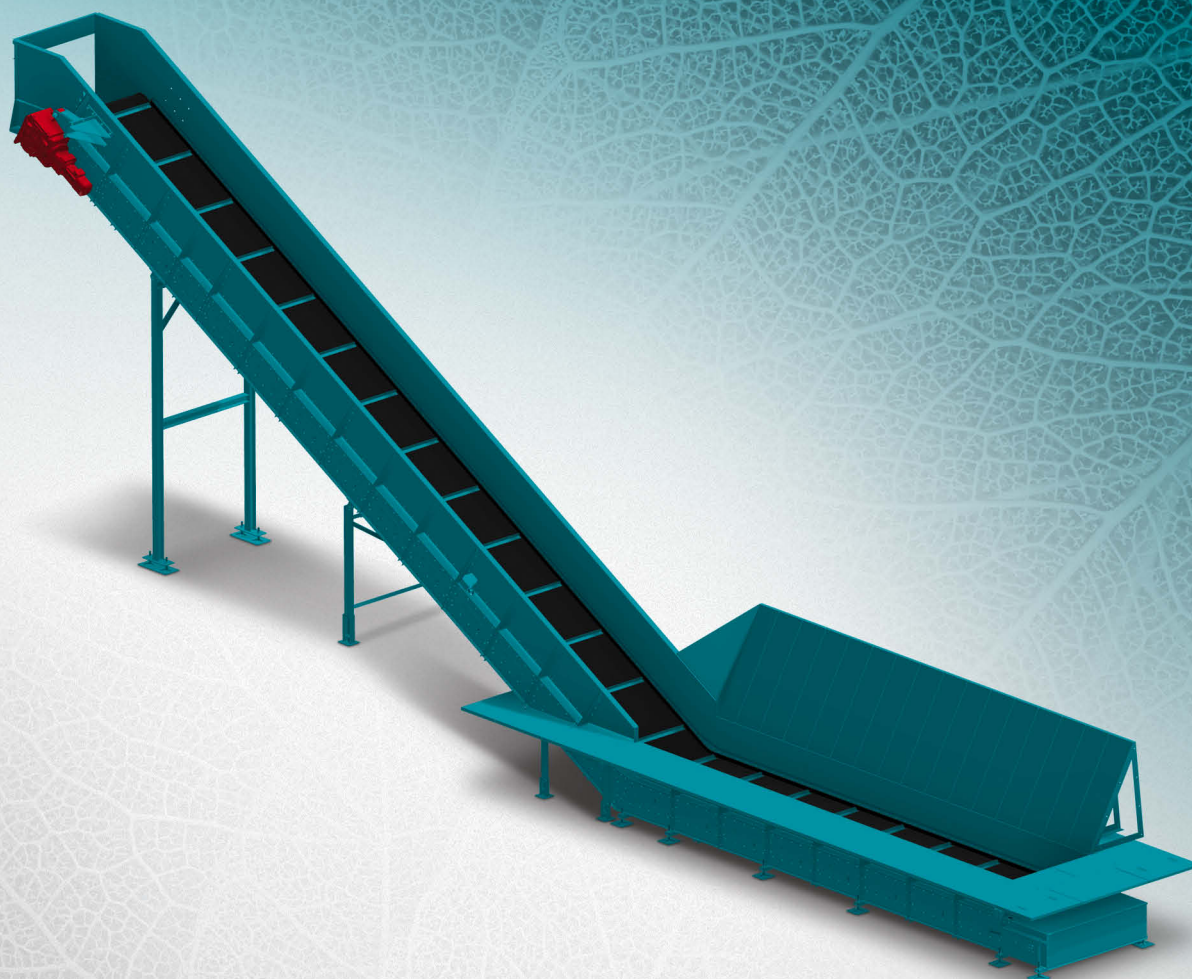

Chain conveyor belts are designed to transport various materials, including mixed municipal waste of heavy bulk load, as well as segregated light fractions like paper, plastic, foil. Due to its construction, chain conveyor belts can be bended in rising (incline) position what allows to transport input material to high located points, even in halls/buildings of limited spatial structure.

CHAIN CONVEYOR BELT

DIAGRAM

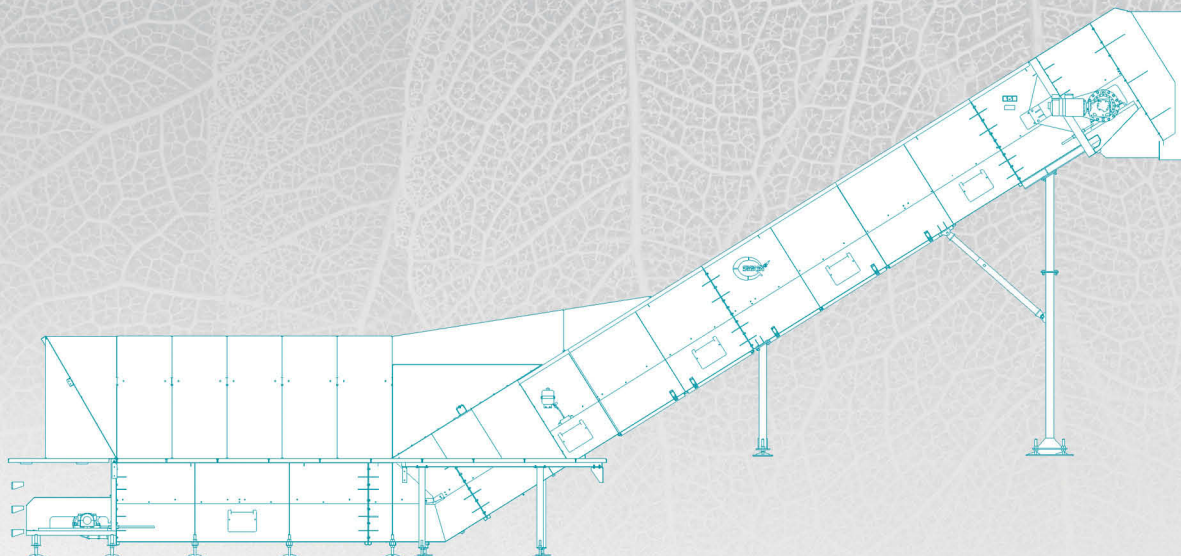

TECHNICAL CHARACTERISTICS

WIDTH [mm]	up to 2000
DRIVE	gearmotor SEW/NORD
SPEED	adjustable according to performance/capacity
TYPE OF TRANSPORTED MATERIAL	municipal waste, natural aggregates etc.

ADDITIONAL INFORMATION

- automated chain lubrication system
- adapted to work both in closed facilities and in open spaces
- possibility to be installed in channels
- brush system applied
- possibility to install dustproof cover
- innovative sealing system of conveyor route



Technical parameters of our devices are being selected according to experience of SIGMA engineers and individual customer's requirements.